

Fig. 1.

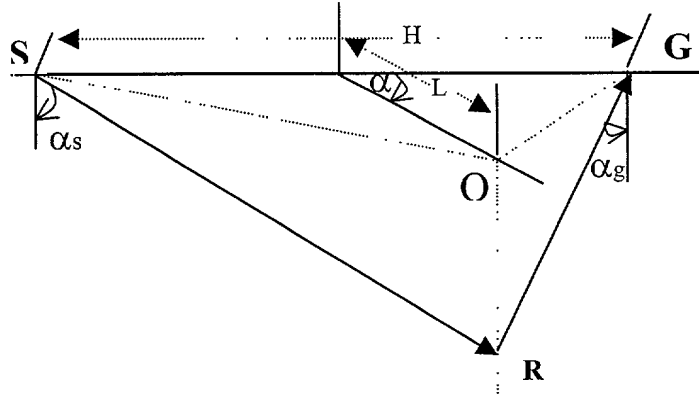


Fig. 2. A reflector point  $R$  is specified in the macro-velocity model. The travel-time is computed to  $R$  from all source points  $S$  and from all receiver points  $G$ .

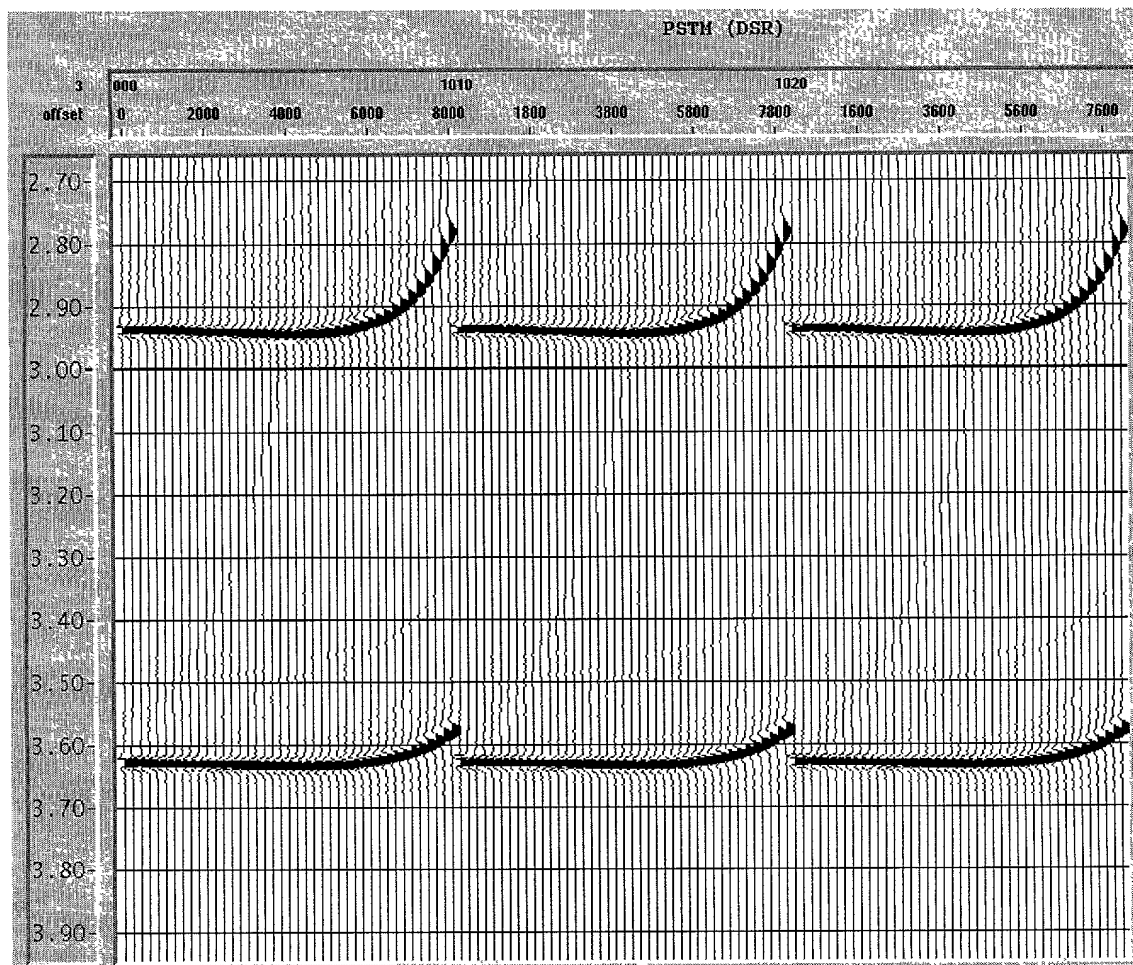


Fig. 3..

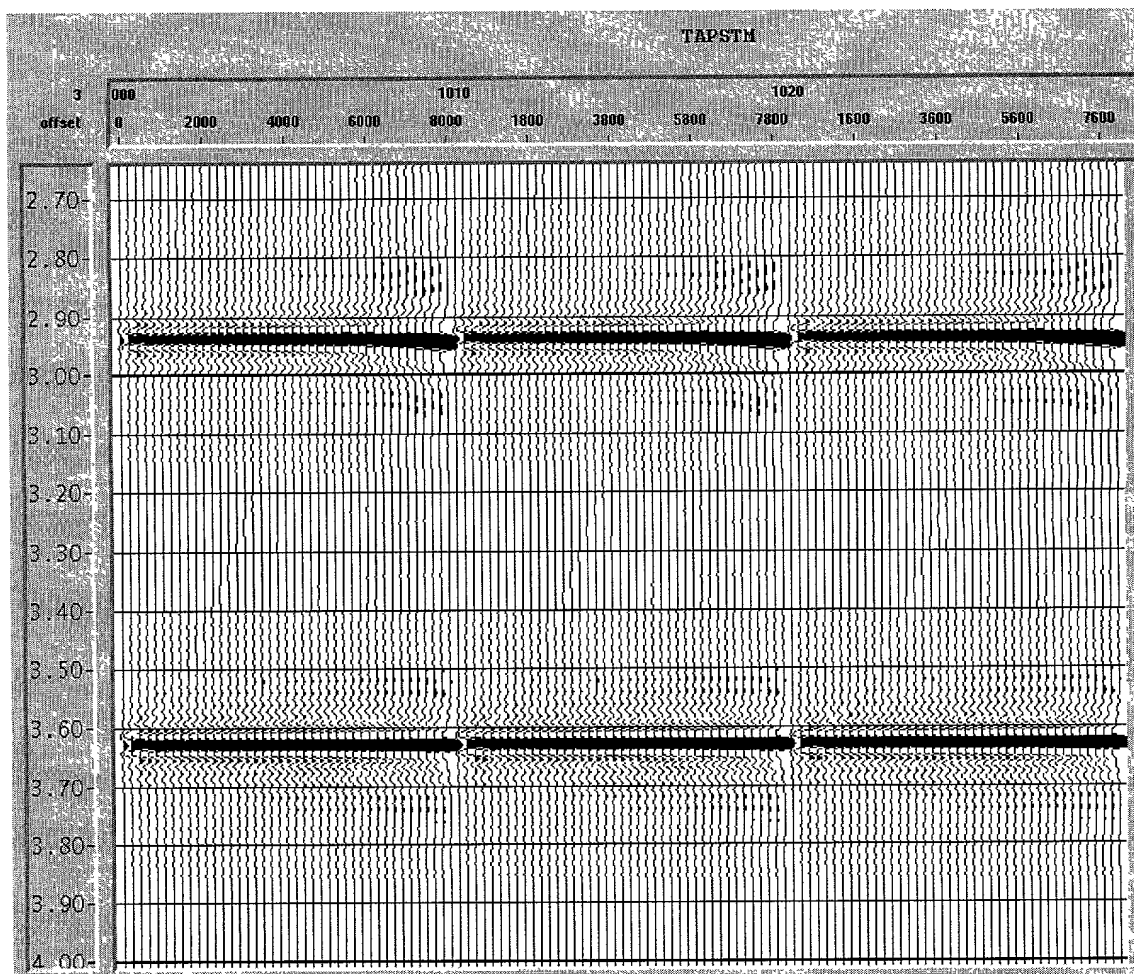


Fig. 4.

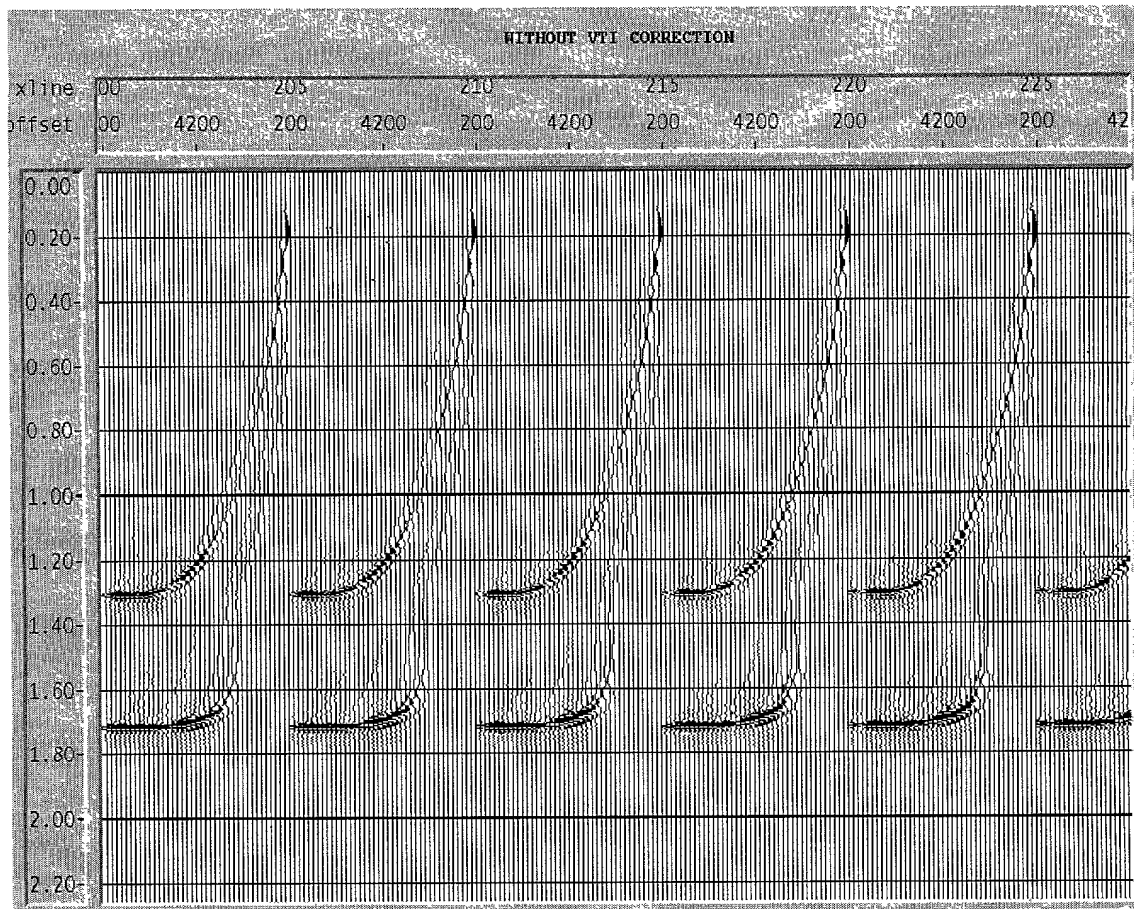


Fig. 5.

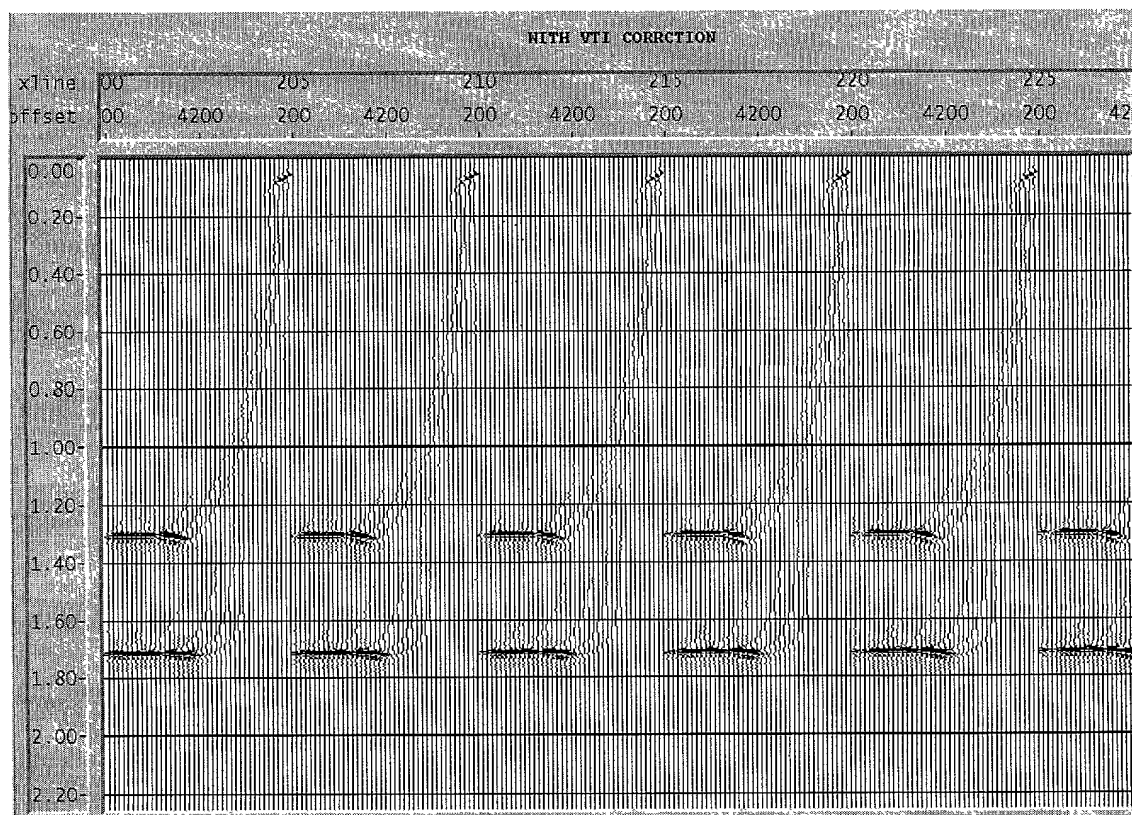


Fig. 6.

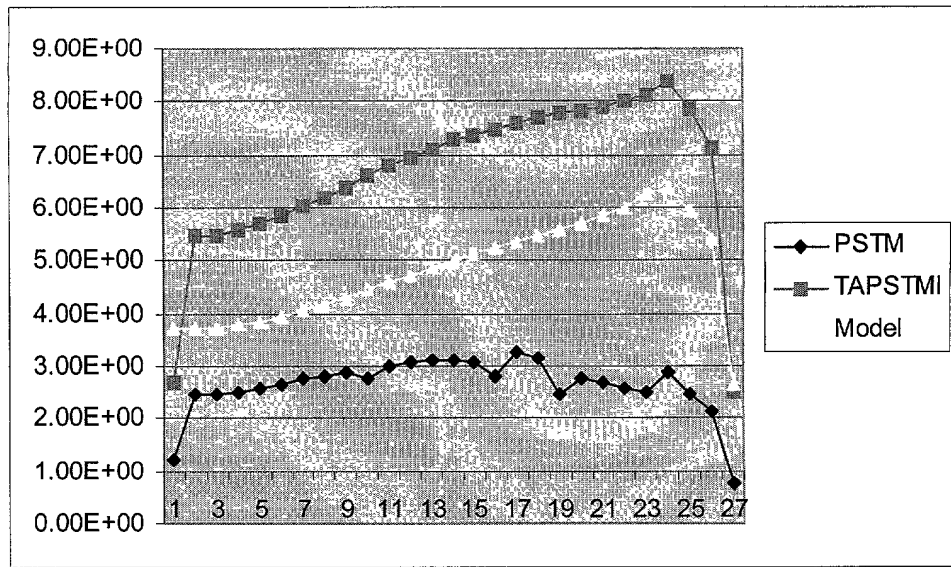


Fig. 7.

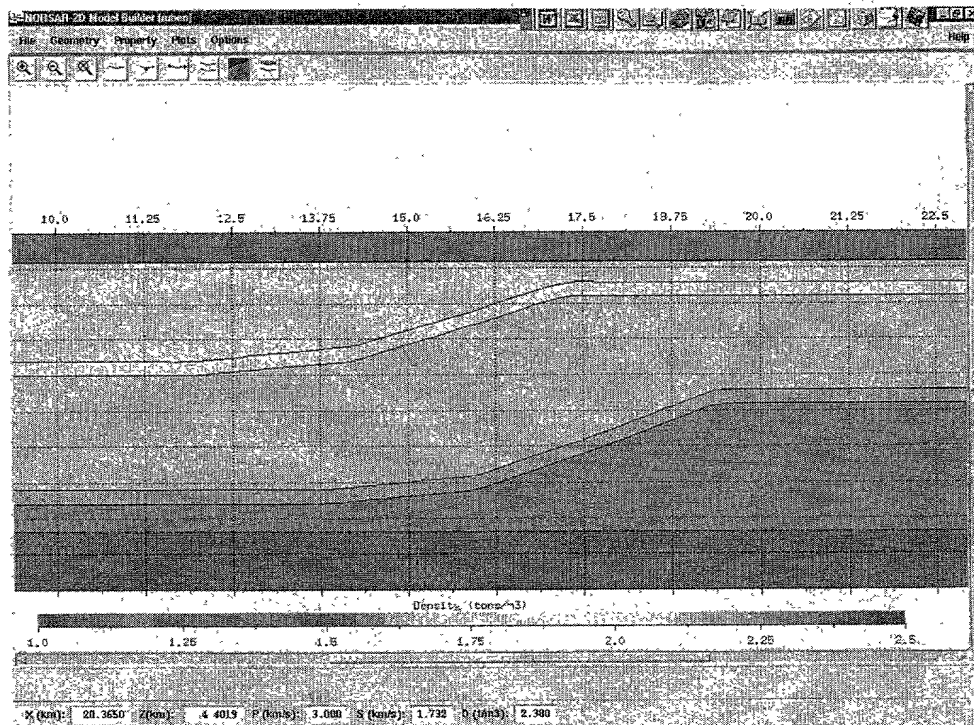


Fig. 8.



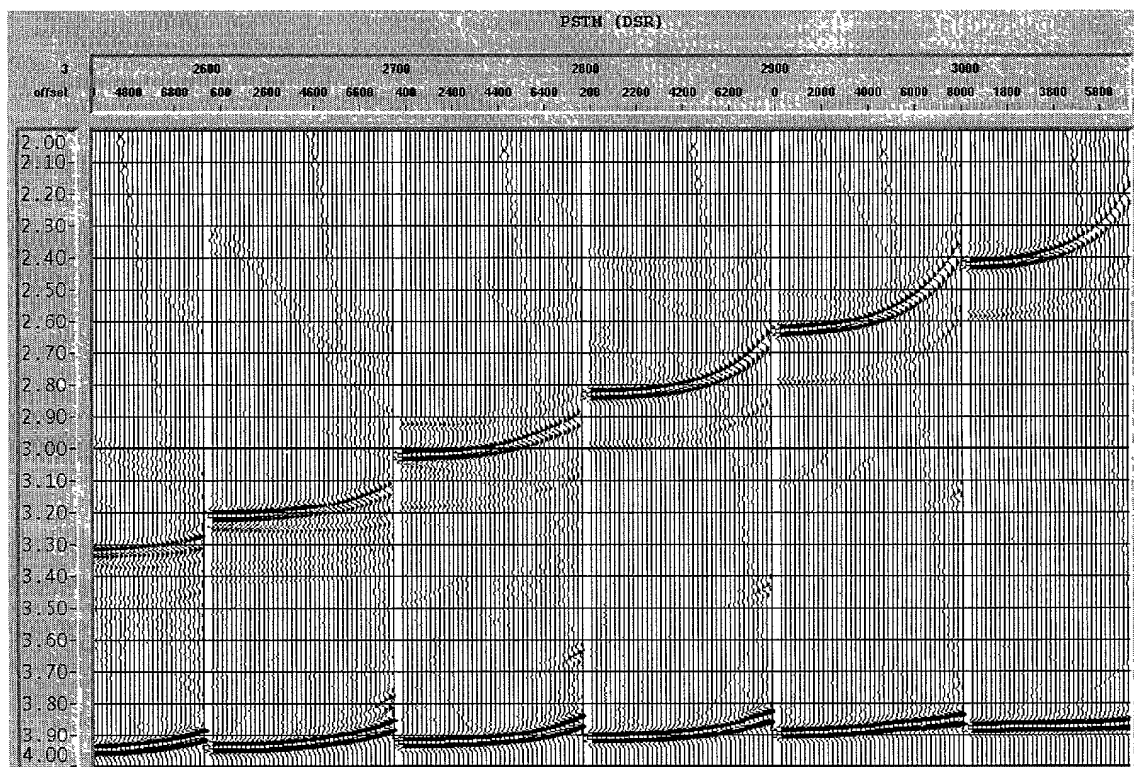


Fig. 9.

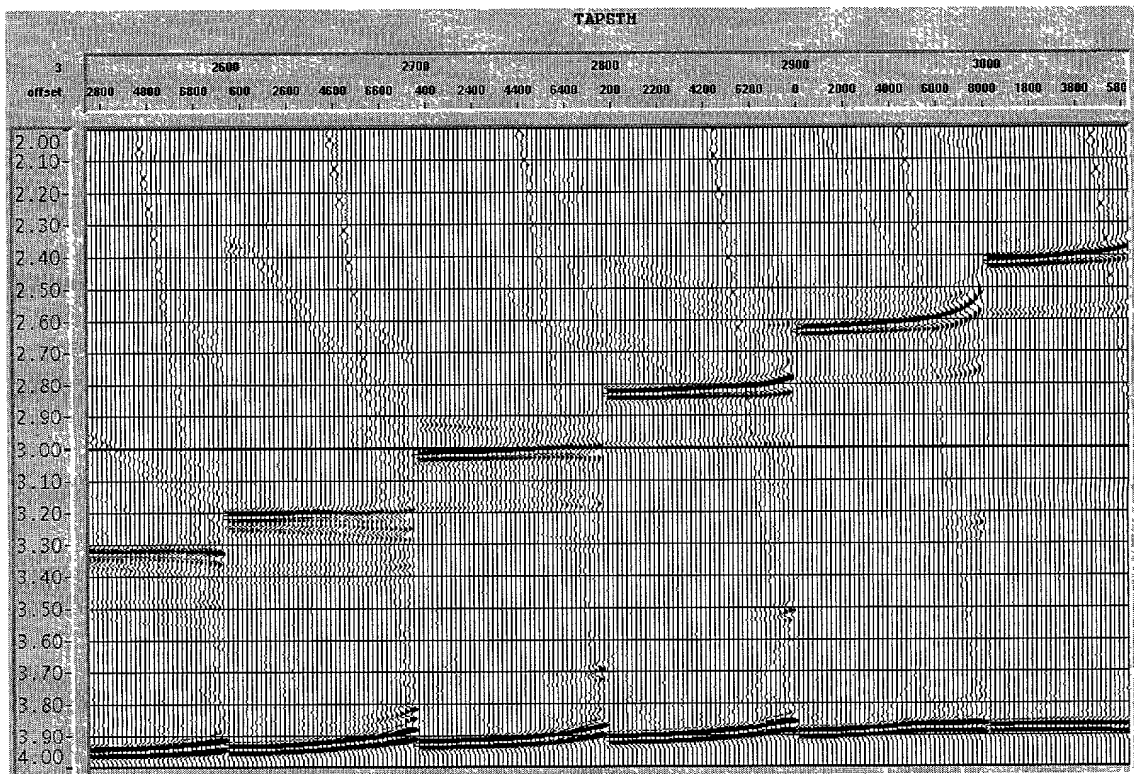


Fig. 10.

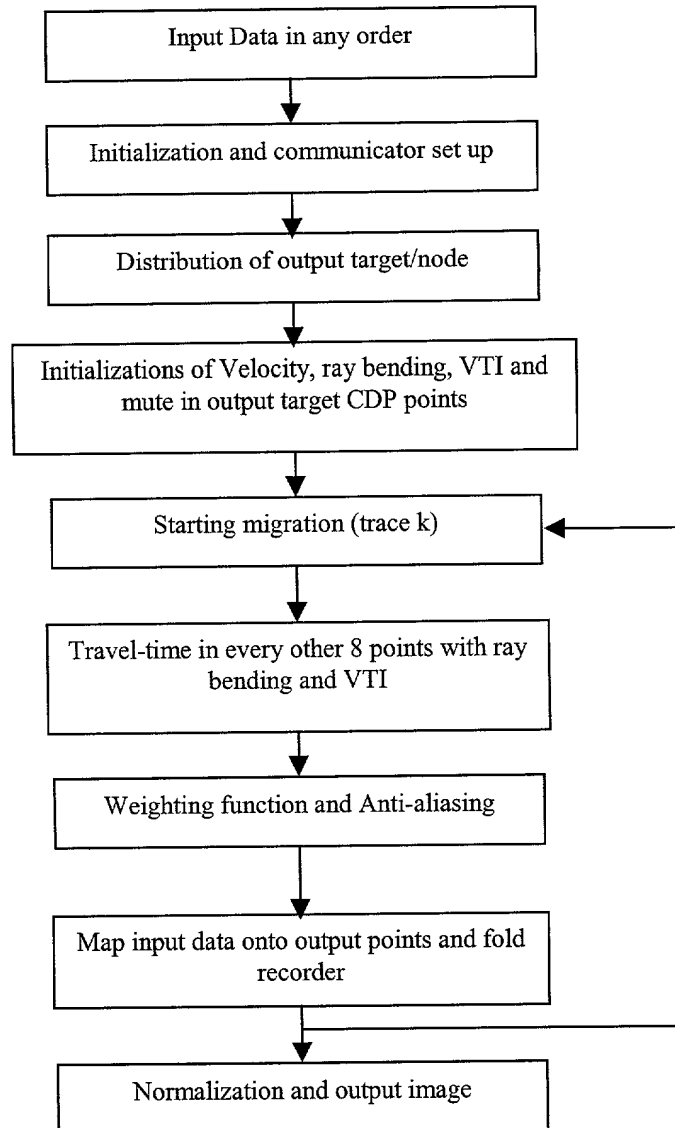


Fig 11.